

# Lecture 8: Training Neural Networks Part III

# Administrivia

**Homework 1** due 11:59 pm, 9/28 (today!) — follow instructions and submit on Gradescope.

**Homework 2** will be released tomorrow.

**Project proposals** due 10/8

TAs will provide more details on Tuesday's lecture 10/3

Most of us will be at ICCV next week — apologies for fewer office hours, Thursday's lecture will be remote

# Administrivia

Optional discussion on **Vector, Matrix, and Tensor Derivatives**, led by Eddie

Friday (9/29) from 10-11am in CS142

Join via zoom — <https://umass-amherst.zoom.us/j/2799045978> (will be recorded)

# Project proposals

<https://cvi-umass.github.io/compsci682-fall-2023/projects/>

The project proposal should be concise (200-400 words). You can use the provided [template](#). Your proposal should contain:

- **Group Members:** Who are the (2~3) group members? What will each person do? (This needs to be a separate detailed paragraph)
- **Motivation:** What is the problem that you will be investigating? Why is it interesting?
- **Literature Review:** What reading will you examine to provide context and background?
- **Data:** What data will you use? If you are collecting new datasets, how do you plan to collect them? If the datasets are huge what compute resources are you using?
- **Approach:** What method or algorithm are you proposing? If there are existing implementations, will you use them and how? How do you plan to improve or modify such implementations?
- **Evaluation Metric:** How will you evaluate your results? Qualitatively, what kind of results do you expect (e.g. plots or figures)? Quantitatively, what kind of analysis will you use to evaluate and/or compare your results (e.g. what performance metrics or statistical tests)?
- **References:** Bibliography of papers based on which your project idea is based.

**Submission:** Please upload a PDF file to Gradescope. Please coordinate with your teammate and **submit only under ONE of your accounts**, and add your teammate on Gradescope.

# Project proposals

<https://cvi-umass.github.io/compsci682-fall-2023/projects/>

## Overview

The course project is an opportunity for you to apply what you have learned in class to a problem of your own choice.

You are encouraged to select a topic and work on your own project. Potential projects usually

- **Applications.** If you're coming to the class with a specific background and interests (e.g. machine learning), you can work on problems related to your particular domain of interest. Pick a real-world problem and apply your knowledge to solve it.
- **Models.** You can build a new model (algorithm) with deep neural networks, or a new variation of an existing model. This is often challenging, and sometimes leads to a piece of publishable work.

Here you can find some sample project ideas:

- [Sample project ideas from TAs, Fall 2023 \(Google Docs\)](#)
- [Sample project ideas from Prof. Erik Learned-Miller last semester \(Google Docs\)](#)

# Anonymous feedback

682 anonymous feedback form (Fall 23)

We are always working to improve the course and your feedback is valuable. Please let us know what you feel works well and what doesn't, and changes that you'd like to see. Submit feedback as often as needed throughout the semester. The form is anonymous.

— Course Staff @ 682, Fall 2023

smaji@umass.edu [Switch account](#)

Not shared

What do you like MOST about the class?

Your answer

What do you like LEAST about the class?

Your answer

What changes would you suggest to better enhance your learning?

Your answer

Any other comments?

Your answer

<https://forms.gle/uFyBtoXuwqZL7aSQ6>

Fill as often as you like throughout the semester!

# Anonymous feedback

Lectures are enjoyable and engaging.

Assignments are well-structured, with code broken down into understandable sections.

There's a detailed walkthrough of the underlying workings of neural networks.

The course is well-organized, clear structure, challenging, interesting.

TAs are helpful and easy to approach.

Assignments are practical, allowing students to apply lecture concepts.

Sample size = 9

Like MOST?

# Anonymous feedback

Assignments are time-intensive and often require more time than anticipated.

Allow use of high-level libraries and APIs

Course requires a strong prior understanding of the content.

More emphasis on the mathematical aspects

Hard to hear / audio issues — **have enabled transcripts**

Remote participation is hard — **will upload videos by end of lecture day**

Sample size = 9

Like LEAST?  
/ Improvement  
Suggestions



# Overview

## 1. One time setup

activation functions, preprocessing, weight initialization, regularization, *batch normalization*, *gradient checking*

## 2. Training dynamics


*babysitting the learning process*, hyperparameter optimization, parameter updates

## 3. Evaluation model ensembles

# Batch Normalization

# Batch Normalization

[Ioffe and Szegedy, 2015]

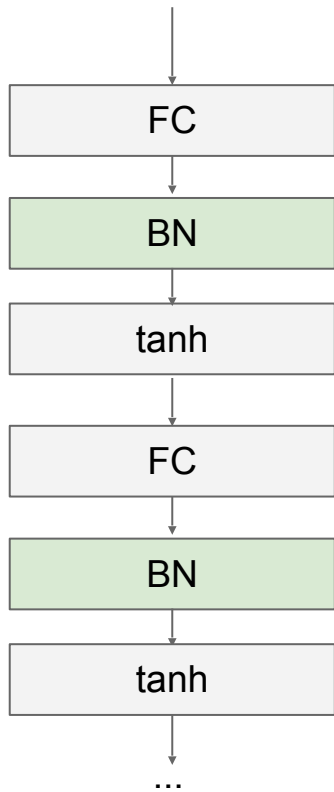

Usually inserted after Fully Connected (or Convolutional, as we'll see soon) layers, and before nonlinearity.

$$\hat{x}^{(k)} = \frac{x^{(k)} - \mathbb{E}[x^{(k)}]}{\sqrt{\text{Var}[x^{(k)}]}}$$

# Batch Normalization

[Ioffe and Szegedy, 2015]

“you want unit Gaussian activations? just make them so.”

Not actually “Gaussian”. Just zero mean, unit variance.

consider a batch of activations at some layer.

To make each dimension unit normalized,

apply:


$$\hat{x}^{(k)} = \frac{x^{(k)} - \mathbb{E}[x^{(k)}]}{\sqrt{\text{Var}[x^{(k)}]}}$$

this is a vanilla  
differentiable function...

# Batch Normalization

[Ioffe and Szegedy, 2015]

“you want unit Gaussian activations? just make them so.”  
Not actually “Gaussian”. Just zero mean, unit variance.

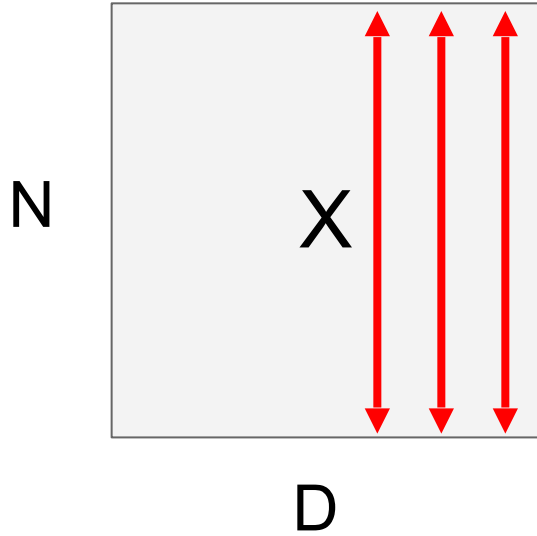


1. compute the empirical mean and variance independently for each dimension.

2. Normalize

$$\hat{x}^{(k)} = \frac{x^{(k)} - \mathbb{E}[x^{(k)}]}{\sqrt{\text{Var}[x^{(k)}]}}$$

# Batch Normalization

[Ioffe and Szegedy, 2015]

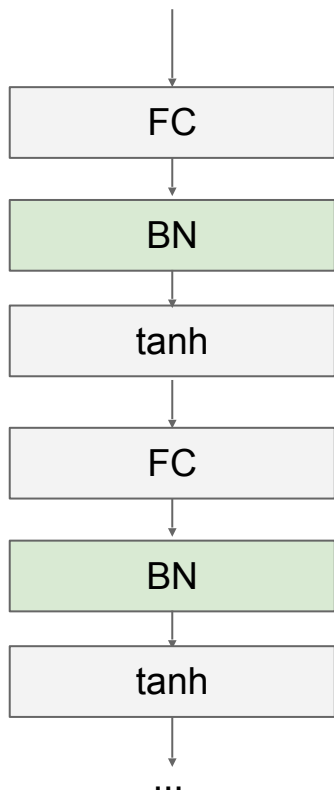

Usually inserted after Fully Connected / (or Convolutional, as we'll see soon) layers, and before nonlinearity.

$$\hat{x}^{(k)} = \frac{x^{(k)} - \mathbb{E}[x^{(k)}]}{\sqrt{\text{Var}[x^{(k)}]}}$$

# Batch Normalization

[Ioffe and Szegedy, 2015]

Normalize:

$$\hat{x}^{(k)} = \frac{x^{(k)} - \mathbb{E}[x^{(k)}]}{\sqrt{\text{Var}[x^{(k)}]}}$$

And then allow the network to squash the range if it wants to:

$$y^{(k)} = \gamma^{(k)} \hat{x}^{(k)} + \beta^{(k)}$$

Note, the network can learn:

$$\gamma^{(k)} = \sqrt{\text{Var}[x^{(k)}]}$$

$$\beta^{(k)} = \mathbb{E}[x^{(k)}]$$

to recover the identity mapping.

# Batch Normalization

[Ioffe and Szegedy, 2015]

**Input:** Values of  $x$  over a mini-batch:  $\mathcal{B} = \{x_{1\dots m}\}$ ;  
Parameters to be learned:  $\gamma, \beta$

**Output:**  $\{y_i = \text{BN}_{\gamma, \beta}(x_i)\}$

$$\mu_{\mathcal{B}} \leftarrow \frac{1}{m} \sum_{i=1}^m x_i \quad // \text{ mini-batch mean}$$

$$\sigma_{\mathcal{B}}^2 \leftarrow \frac{1}{m} \sum_{i=1}^m (x_i - \mu_{\mathcal{B}})^2 \quad // \text{ mini-batch variance}$$

$$\hat{x}_i \leftarrow \frac{x_i - \mu_{\mathcal{B}}}{\sqrt{\sigma_{\mathcal{B}}^2 + \epsilon}} \quad // \text{ normalize}$$

$$y_i \leftarrow \gamma \hat{x}_i + \beta \equiv \text{BN}_{\gamma, \beta}(x_i) \quad // \text{ scale and shift}$$

- Improves gradient flow through the network
- Allows higher learning rates
- Reduces the strong dependence on initialization



# Batch Normalization

[Ioffe and Szegedy, 2015]

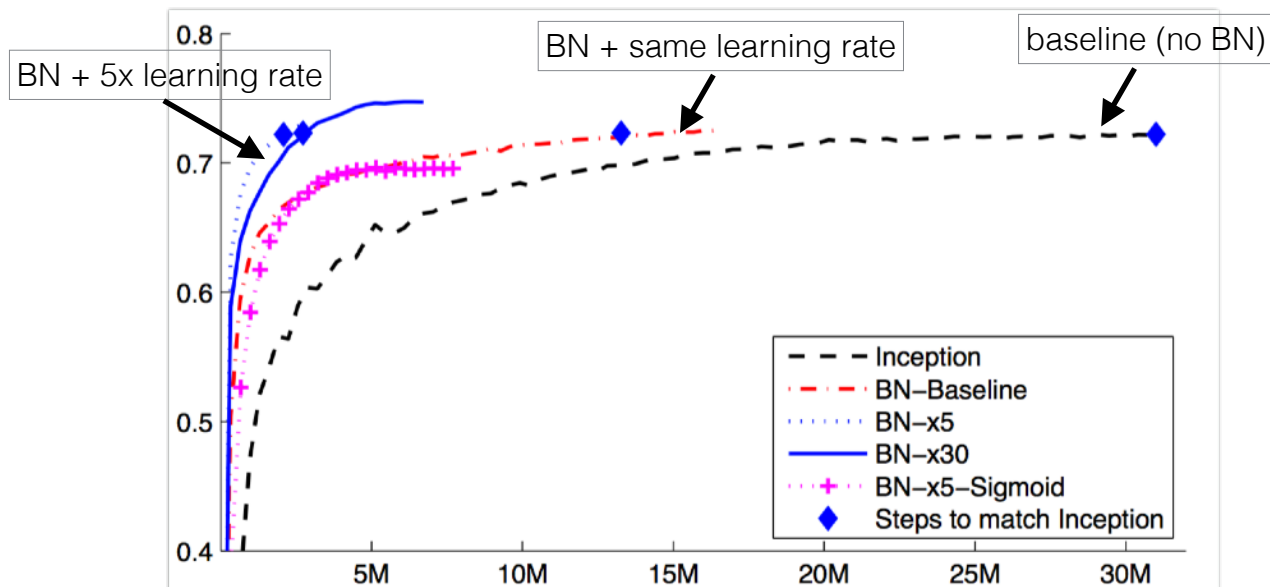


Figure 2: *Single crop validation accuracy of Inception and its batch-normalized variants, vs. the number of training steps.*

# Batch Normalization

[Ioffe and Szegedy, 2015]

**Input:** Values of  $x$  over a mini-batch:  $\mathcal{B} = \{x_{1\dots m}\}$ ;  
Parameters to be learned:  $\gamma, \beta$

**Output:**  $\{y_i = \text{BN}_{\gamma, \beta}(x_i)\}$

$$\mu_{\mathcal{B}} \leftarrow \frac{1}{m} \sum_{i=1}^m x_i \quad // \text{ mini-batch mean}$$

$$\sigma_{\mathcal{B}}^2 \leftarrow \frac{1}{m} \sum_{i=1}^m (x_i - \mu_{\mathcal{B}})^2 \quad // \text{ mini-batch variance}$$

$$\hat{x}_i \leftarrow \frac{x_i - \mu_{\mathcal{B}}}{\sqrt{\sigma_{\mathcal{B}}^2 + \epsilon}} \quad // \text{ normalize}$$

$$y_i \leftarrow \gamma \hat{x}_i + \beta \equiv \text{BN}_{\gamma, \beta}(x_i) \quad // \text{ scale and shift}$$

**Note: at test time BatchNorm layer functions differently:**

The mean/std are not computed based on the batch. Instead, a single fixed empirical mean of activations during training is used.

(e.g. can be estimated during training with running averages)

Source of many bugs!

# Gradient Checking

# Gradient checks


1-sided

$$\frac{df}{dx} \approx \frac{1}{h} (f(x+h) - f(x))$$

Compare gradient implementation with numerical gradients

Easy to implement, but slow

Numerical precision can be an issue  
(want  $h$  to be small but not too small)

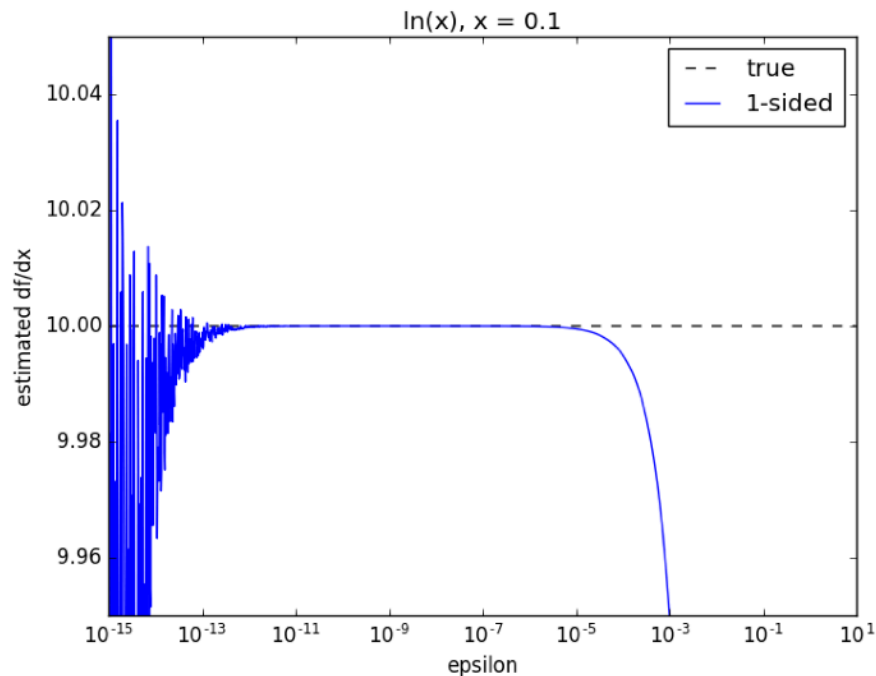

# Gradient checks


1-sided

$$\frac{df}{dx} \approx \frac{1}{h} (f(x+h) - f(x))$$

2-sided

$$\frac{df}{dx} \approx \frac{1}{2h} (f(x-h) - f(x+h))$$

2-sided gradients have better numerical stability!

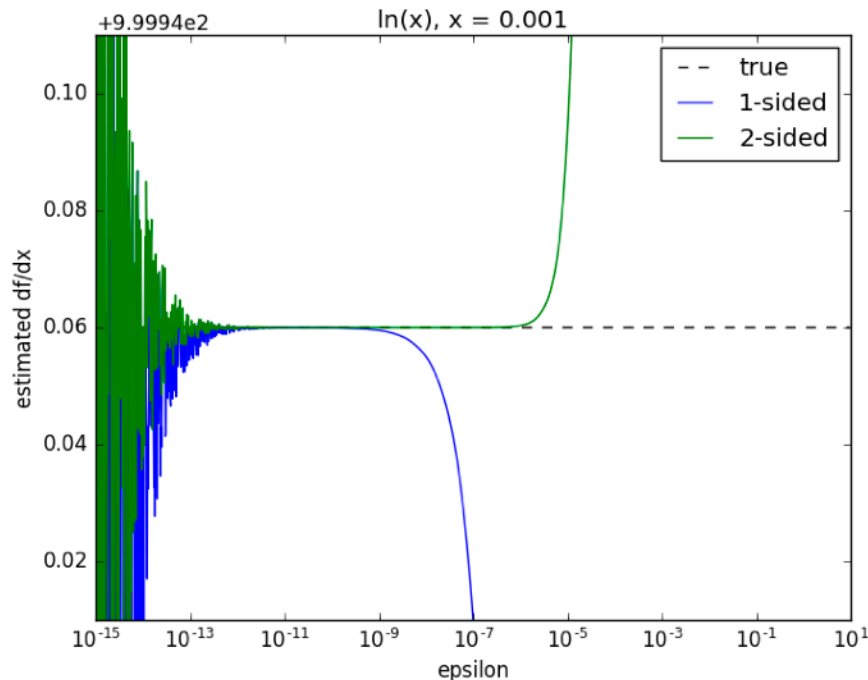

# Gradient checks

1-sided

$$\frac{df}{dx} \approx \frac{1}{h} (f(x+h) - f(x))$$

2-sided

$$\frac{df}{dx} \approx \frac{1}{2h} (f(x-h) - f(x+h))$$


4-sided

$$\frac{df}{dx} \approx \frac{1}{12h} (-f(x+2h) + 8f(x+h) - 8f(x-h) + f(x-2h))$$

How about 6 sided or 12 sided?

<https://justindomke.wordpress.com/2017/04/22/you-deserve-better-than-two-sided-finite-differences/>

4-sided gradients are even better!

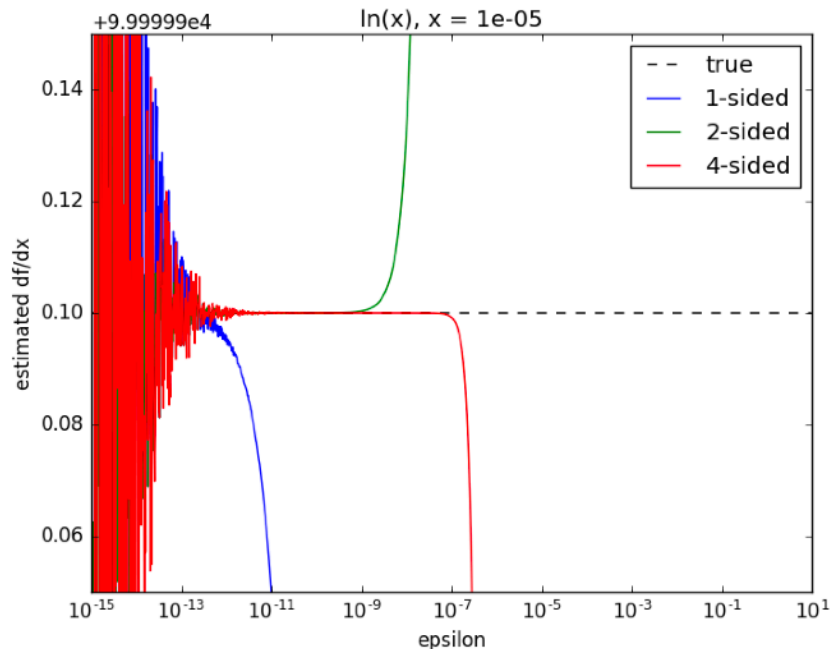

# Overview

## 1. One time setup

activation functions, preprocessing, weight initialization, regularization, *batch normalization*, *gradient checking*

## 2. Training dynamics


*babysitting the learning process*, hyperparameter optimization, parameter updates

## 3. Evaluation model ensembles

# Babysitting the Learning Process




# Step 1: Preprocess the data

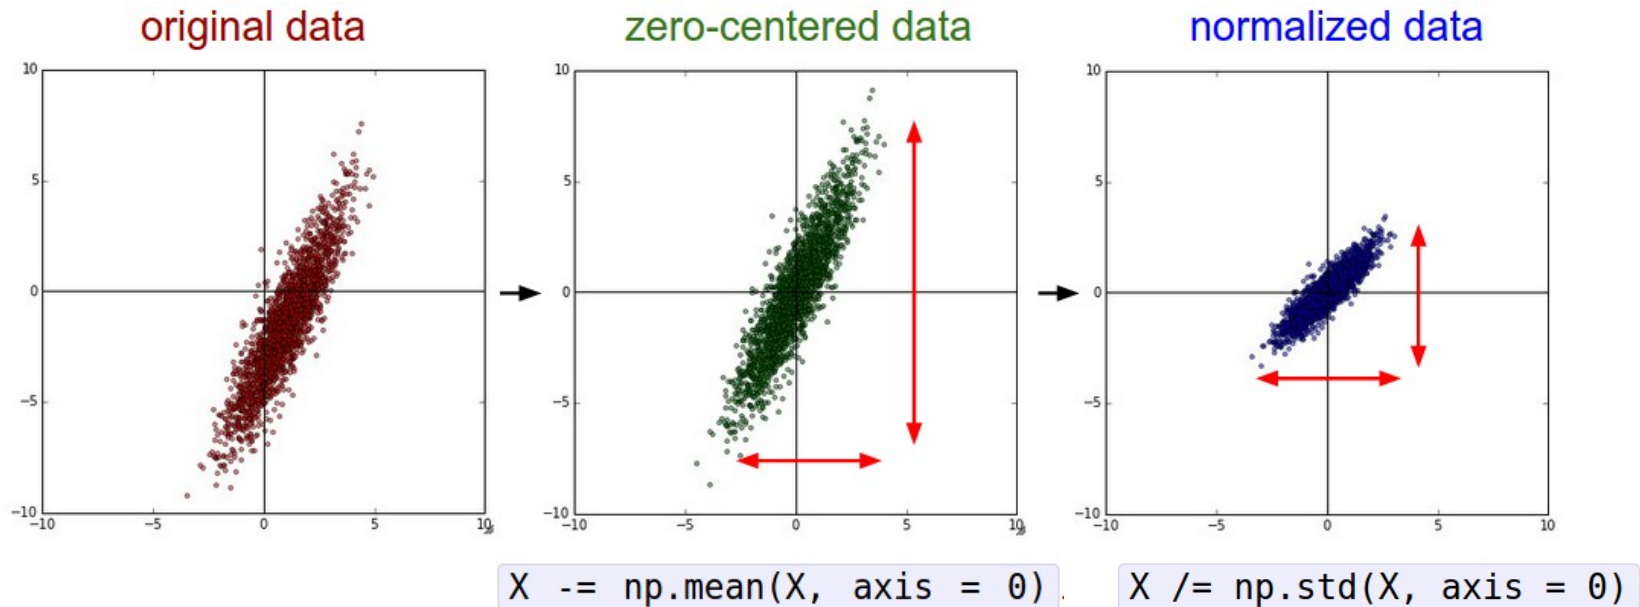

(Assume  $X$  [NxD] is data matrix,  
each example in a row)

## Step 2: Choose the architecture:

say we start with one hidden layer of 50 neurons:

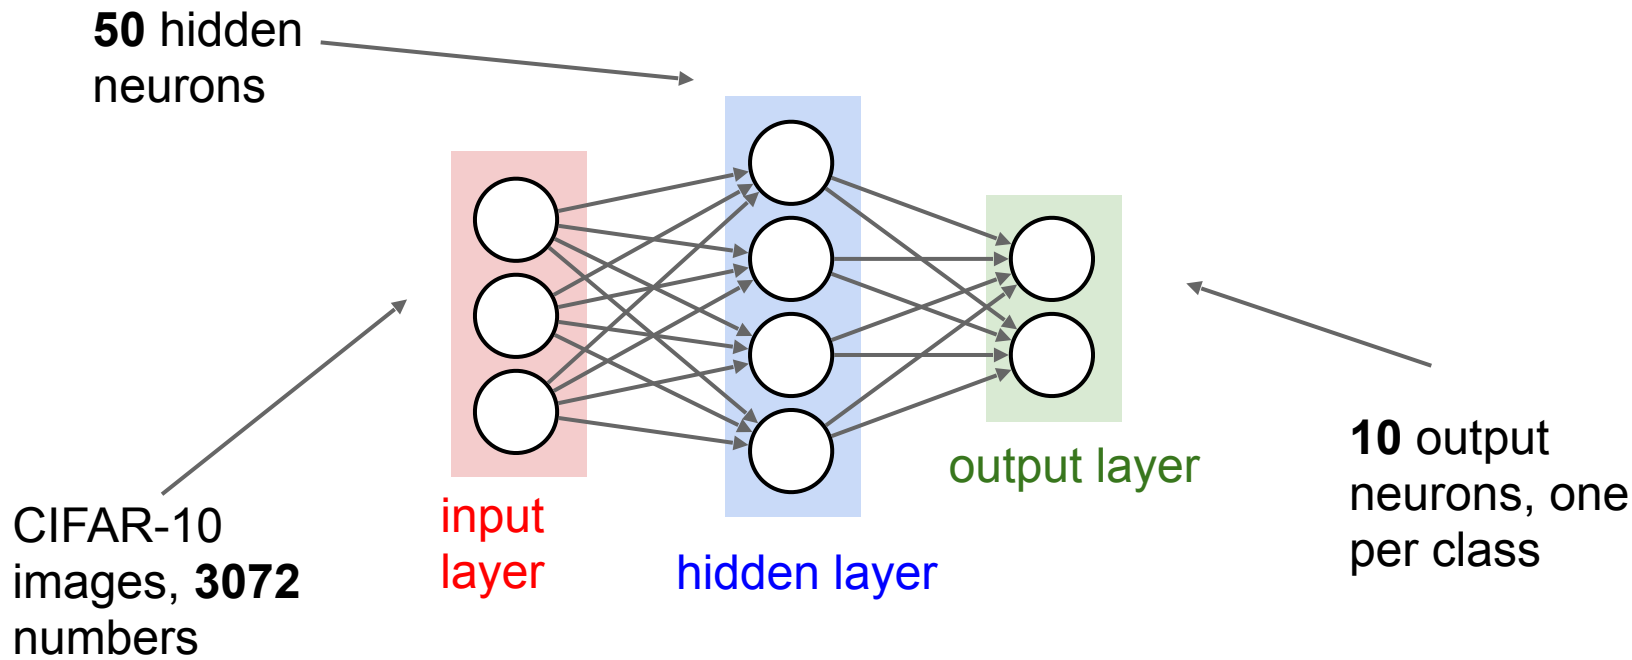

# Double check that the loss is reasonable:

```
def init_two_layer_model(input_size, hidden_size, output_size):  
    # initialize a model  
    model = {}  
    model['W1'] = 0.0001 * np.random.randn(input_size, hidden_size)  
    model['b1'] = np.zeros(hidden_size)  
    model['W2'] = 0.0001 * np.random.randn(hidden_size, output_size)  
    model['b2'] = np.zeros(output_size)  
    return model
```

```
model = init_two_layer_model(32*32*3, 50, 10) # input size, hidden size, number of classes  
loss, grad = two_layer_net(X_train, model, y_train, 0.0) # disable regularization  
print loss
```

2.30261216167

loss ~2.3.  
"correct" for  
10 classes

returns the loss and the  
gradient for all parameters

# Double check that the loss is reasonable:

```
def init_two_layer_model(input_size, hidden_size, output_size):
    # initialize a model
    model = {}
    model['W1'] = 0.0001 * np.random.randn(input_size, hidden_size)
    model['b1'] = np.zeros(hidden_size)
    model['W2'] = 0.0001 * np.random.randn(hidden_size, output_size)
    model['b2'] = np.zeros(output_size)
    return model
```

```
model = init_two_layer_model(32*32*3, 50, 10) # input size, hidden size, number of classes
loss, grad = two_layer_net(X_train, model, y_train, 1e3) # crank up regularization
print loss
```

3.06859716482

← loss went up, good. (sanity check)

# Lets try to train now...

**Tip:** Make sure that you can overfit very small portion of the training data

```
model = init_two_layer_model(32*32*3, 50, 10) # input size, hidden size, number of classes
trainer = ClassifierTrainer()
X_tiny = X_train[:20] # take 20 examples
y_tiny = y_train[:20]
best_model, stats = trainer.train(X_tiny, y_tiny, X_tiny, y_tiny,
                                  model, two_layer_net,
                                  num_epochs=200, reg=0.0,
                                  update='sgd', learning_rate_decay=1,
                                  sample_batches = False,
                                  learning_rate=1e-3, verbose=True)
```

The above code:

- take the first 20 examples from CIFAR-10
- turn off regularization (reg = 0.0)
- use simple vanilla 'sgd'



Lets try to train now...

**Tip:** Make sure that you can overfit very small portion of the training data

Very small loss, train accuracy 1.00, nice!

```
model = init_two_layer_model(32*32*3, 50, 10) # input size, hidden size, number of classes
trainer = ClassifierTrainer()
X_tiny = X_train[:20] # take 20 examples
y_tiny = y_train[:20]
best_model, stats = trainer.train(X_tiny, y_tiny, X_tiny, y_tiny,
                                  model, two_layer_net,
                                  num_epochs=200, reg=0.0,
                                  update='sgd', learning_rate_decay=1,
                                  sample_batches = False,
                                  learning_rate=1e-3, verbose=True)
```

```
Finished epoch 1 / 200: cost 2.302603, train: 0.400000, val 0.400000, lr 1.000000e-03
Finished epoch 2 / 200: cost 2.302258, train: 0.450000, val 0.450000, lr 1.000000e-03
Finished epoch 3 / 200: cost 2.301849, train: 0.600000, val 0.600000, lr 1.000000e-03
Finished epoch 4 / 200: cost 2.301196, train: 0.650000, val 0.650000, lr 1.000000e-03
Finished epoch 5 / 200: cost 2.300044, train: 0.650000, val 0.650000, lr 1.000000e-03
Finished epoch 6 / 200: cost 2.297864, train: 0.550000, val 0.550000, lr 1.000000e-03
Finished epoch 7 / 200: cost 2.293595, train: 0.600000, val 0.600000, lr 1.000000e-03
Finished epoch 8 / 200: cost 2.285096, train: 0.550000, val 0.550000, lr 1.000000e-03
Finished epoch 9 / 200: cost 2.268094, train: 0.550000, val 0.550000, lr 1.000000e-03
Finished epoch 10 / 200: cost 2.234787, train: 0.500000, val 0.500000, lr 1.000000e-03
Finished epoch 11 / 200: cost 2.173187, train: 0.500000, val 0.500000, lr 1.000000e-03
Finished epoch 12 / 200: cost 2.076862, train: 0.500000, val 0.500000, lr 1.000000e-03
Finished epoch 13 / 200: cost 1.974090, train: 0.400000, val 0.400000, lr 1.000000e-03
Finished epoch 14 / 200: cost 1.895885, train: 0.400000, val 0.400000, lr 1.000000e-03
Finished epoch 15 / 200: cost 1.820876, train: 0.450000, val 0.450000, lr 1.000000e-03
Finished epoch 16 / 200: cost 1.737430, train: 0.450000, val 0.450000, lr 1.000000e-03
Finished epoch 17 / 200: cost 1.642356, train: 0.500000, val 0.500000, lr 1.000000e-03
Finished epoch 18 / 200: cost 1.535239, train: 0.600000, val 0.600000, lr 1.000000e-03
Finished epoch 19 / 200: cost 1.421527, train: 0.600000, val 0.600000, lr 1.000000e-03
Finished epoch 20 / 200: cost 1.305760, train: 0.650000, val 0.650000, lr 1.000000e-03
.....
Finished epoch 195 / 200: cost 0.002694, train: 1.000000, val 1.000000, lr 1.000000e-03
Finished epoch 196 / 200: cost 0.002674, train: 1.000000, val 1.000000, lr 1.000000e-03
Finished epoch 197 / 200: cost 0.002655, train: 1.000000, val 1.000000, lr 1.000000e-03
Finished epoch 198 / 200: cost 0.002635, train: 1.000000, val 1.000000, lr 1.000000e-03
Finished epoch 199 / 200: cost 0.002617, train: 1.000000, val 1.000000, lr 1.000000e-03
Finished epoch 200 / 200: cost 0.002597, train: 1.000000, val 1.000000, lr 1.000000e-03
finished optimization. best validation accuracy: 1.000000
```

Lets try to train now...

I like to start with small regularization and find learning rate that makes the loss go down.

```
model = init_two_layer_model(32*32*3, 50, 10) # input size, hidden size, number of classes
trainer = ClassifierTrainer()
best_model, stats = trainer.train(X_train, y_train, X_val, y_val,
                                  model, two_layer_net,
                                  num_epochs=10, reg=0.000001,
                                  update='sgd', learning_rate_decay=1,
                                  sample_batches = True,
                                  learning_rate=1e-6, verbose=True)
```

Lets try to train now...

I like to start with small regularization and find learning rate that makes the loss go down.

```
model = init_two_layer_model(32*32*3, 50, 10) # input size, hidden size, number of classes
trainer = ClassifierTrainer()
best_model, stats = trainer.train(X_train, y_train, X_val, y_val,
                                  model, two_layer_net,
                                  num_epochs=10, reg=0.000001,
                                  update='sgd', learning_rate_decay=1,
                                  sample_batches = True,
                                  learning_rate=1e-6, verbose=True)
```

Epoch	Cost	Train Loss	Val Loss	Learning Rate
1 / 10	2.302576	0.080000	0.103000	1.000000e-06
2 / 10	2.302582	0.121000	0.124000	1.000000e-06
3 / 10	2.302558	0.119000	0.138000	1.000000e-06
4 / 10	2.302519	0.127000	0.151000	1.000000e-06
5 / 10	2.302517	0.158000	0.171000	1.000000e-06
6 / 10	2.302518	0.179000	0.172000	1.000000e-06
7 / 10	2.302466	0.180000	0.176000	1.000000e-06
8 / 10	2.302452	0.175000	0.185000	1.000000e-06
9 / 10	2.302459	0.206000	0.192000	1.000000e-06
10 / 10	2.302420	0.190000	0.192000	1.000000e-06

finished optimization. best validation accuracy: 0.192000

Loss barely changing



Lets try to train now...

I like to start with small regularization and find learning rate that makes the loss go down.

**loss not going down:**  
learning rate too low

```
model = init_two_layer_model(32*32*3, 50, 10) # input size, hidden size, number of classes
trainer = ClassifierTrainer()
best_model, stats = trainer.train(X_train, y_train, X_val, y_val,
                                  model, two_layer_net,
                                  num_epochs=10, reg=0.000001,
                                  update='sgd', learning_rate_decay=1,
                                  sample_batches = True,
                                  learning_rate=1e-6, verbose=True)

Finished epoch 1 / 10: cost 2.302576, train: 0.080000, val 0.103000, lr 1.000000e-06
Finished epoch 2 / 10: cost 2.302582, train: 0.121000, val 0.124000, lr 1.000000e-06
Finished epoch 3 / 10: cost 2.302558, train: 0.119000, val 0.138000, lr 1.000000e-06
Finished epoch 4 / 10: cost 2.302519, train: 0.127000, val 0.151000, lr 1.000000e-06
Finished epoch 5 / 10: cost 2.302517, train: 0.158000, val 0.171000, lr 1.000000e-06
Finished epoch 6 / 10: cost 2.302518, train: 0.179000, val 0.172000, lr 1.000000e-06
Finished epoch 7 / 10: cost 2.302466, train: 0.180000, val 0.176000, lr 1.000000e-06
Finished epoch 8 / 10: cost 2.302452, train: 0.175000, val 0.185000, lr 1.000000e-06
Finished epoch 9 / 10: cost 2.302459, train: 0.206000, val 0.192000, lr 1.000000e-06
Finished epoch 10 / 10: cost 2.302420, train: 0.190000, val 0.192000, lr 1.000000e-06
finished optimization. best validation accuracy: 0.192000
```

Loss barely changing: Learning rate is probably too low

Lets try to train now...

I like to start with small regularization and find learning rate that makes the loss go down.

**loss not going down:**  
learning rate too low

```
model = init_two_layer_model(32*32*3, 50, 10) # input size, hidden size, number of classes
trainer = ClassifierTrainer()
best_model, stats = trainer.train(X_train, y_train, X_val, y_val,
                                  model, two_layer_net,
                                  num_epochs=10, reg=0.000001,
                                  update='sgd', learning_rate_decay=1,
                                  sample_batches = True,
                                  learning_rate=1e-6, verbose=True)

Finished epoch 1 / 10: cost 2.302576, train: 0.080000, val 0.103000, lr 1.000000e-06
Finished epoch 2 / 10: cost 2.302582, train: 0.121000, val 0.124000, lr 1.000000e-06
Finished epoch 3 / 10: cost 2.302558, train: 0.119000, val 0.138000, lr 1.000000e-06
Finished epoch 4 / 10: cost 2.302519, train: 0.127000, val 0.151000, lr 1.000000e-06
Finished epoch 5 / 10: cost 2.302517, train: 0.158000, val 0.171000, lr 1.000000e-06
Finished epoch 6 / 10: cost 2.302518, train: 0.179000, val 0.172000, lr 1.000000e-06
Finished epoch 7 / 10: cost 2.302466, train: 0.180000, val 0.176000, lr 1.000000e-06
Finished epoch 8 / 10: cost 2.302452, train: 0.175000, val 0.185000, lr 1.000000e-06
Finished epoch 9 / 10: cost 2.302459, train: 0.206000, val 0.192000, lr 1.000000e-06
Finished epoch 10 / 10: cost 2.302420, train: 0.190000, val 0.192000, lr 1.000000e-06
finished optimization. best validation accuracy: 0.192000
```

Loss barely changing: Learning rate is probably too low

Notice train/val accuracy goes to 20% though, what's up with that? (remember this is softmax) (go to poll)

Let's try to train now...

I like to start with small regularization and find learning rate that makes the loss go down.

**loss not going down:**  
learning rate too low

```
model = init_two_layer_model(32*32*3, 50, 10) # input size, hidden size, number of classes
trainer = ClassifierTrainer()
best_model, stats = trainer.train(X_train, y_train, X_val, y_val,
                                  model, two_layer_net,
                                  num_epochs=10, reg=0.000001,
                                  update='sgd', learning_rate_decay=1,
                                  sample_batches = True,
                                  learning_rate=1e6, verbose=True)
```

Okay now let's try learning rate 1e6. What could possibly go wrong?

Lets try to train now...

I like to start with small regularization and find learning rate that makes the loss go down.

**loss not going down:**  
learning rate too low  
**loss exploding:**  
learning rate too high

```
model = init_two_layer_model(32*32*3, 50, 10) # input size, hidden size, number of classes
trainer = ClassifierTrainer()
best_model, stats = trainer.train(X_train, y_train, X_val, y_val,
                                  model, two_layer_net,
                                  num_epochs=10, reg=0.000001,
                                  update='sgd', learning_rate_decay=1,
                                  sample_batches = True,
                                  learning_rate=1e6, verbose=True)
```

```
/home/karpathy/cs231n/code/cs231n/classifiers/neural_net.py:50: RuntimeWarning: divide by zero encountered in log
  data_loss = -np.sum(np.log(probs[range(N), y])) / N
/home/karpathy/cs231n/code/cs231n/classifiers/neural_net.py:48: RuntimeWarning: invalid value encountered in subtract
  probs = np.exp(scores - np.max(scores, axis=1, keepdims=True))
Finished epoch 1 / 10: cost nan, train: 0.091000, val 0.087000, lr 1.000000e+06
Finished epoch 2 / 10: cost nan, train: 0.095000, val 0.087000, lr 1.000000e+06
Finished epoch 3 / 10: cost nan, train: 0.100000, val 0.087000, lr 1.000000e+06
```

cost: NaN almost  
always means high  
learning rate...

Lets try to train now...

I like to start with small regularization and find learning rate that makes the loss go down.

**loss not going down:**  
learning rate too low  
**loss exploding:**  
learning rate too high

```
model = init_two_layer_model(32*32*3, 50, 10) # input size, hidden size, number of classes
trainer = ClassifierTrainer()
best_model, stats = trainer.train(X_train, y_train, X_val, y_val,
                                  model, two_layer_net,
                                  num_epochs=10, reg=0.000001,
                                  update='sgd', learning_rate_decay=1,
                                  sample_batches = True,
                                  learning_rate=3e-3, verbose=True)
```

```
Finished epoch 1 / 10: cost 2.186654, train: 0.308000, val 0.306000, lr 3.000000e-03
Finished epoch 2 / 10: cost 2.176230, train: 0.330000, val 0.350000, lr 3.000000e-03
Finished epoch 3 / 10: cost 1.942257, train: 0.376000, val 0.352000, lr 3.000000e-03
Finished epoch 4 / 10: cost 1.827868, train: 0.329000, val 0.310000, lr 3.000000e-03
Finished epoch 5 / 10: cost inf, train: 0.128000, val 0.128000, lr 3.000000e-03
Finished epoch 6 / 10: cost inf, train: 0.144000, val 0.147000, lr 3.000000e-03
```

3e-3 is still too high. Cost explodes....

=> Rough range for learning rate we should be cross-validating is somewhere [1e-3 ... 1e-5]



# Practical Recommendations for Gradient-Based Training of Deep Architectures

Yoshua Bengio

Version 2, Sept. 16th, 2012

## Abstract

Learning algorithms related to artificial neural networks and in particular for Deep Learning may seem to involve many bells and whistles, called hyper-parameters. This chapter is meant as a practical guide with recommendations for some of the most commonly used hyper-parameters, in particular in the context of learning algorithms based on back-

of practice, focusing on learning algorithms aiming at training deep neural networks, but leaving most of the material specific to the Boltzmann machine family to another chapter (Hinton, 2013).

Although such recommendations come out of a living practice that emerged from years of experimentation and to some extent mathematical justification, they should be challenged. They constitute a good starting point for the experimenter and user of learn-

# Hyperparameter Optimization

# Cross-validation strategy

I like to do **coarse** -> **fine** cross-validation in stages

**First stage:** only a few epochs to get rough idea of what params work

**Second stage:** longer running time, finer search

... (repeat as necessary)

Tip for detecting explosions in the solver:

If the cost is ever  $> 3 * \text{original cost}$ , break out early



# For example: run coarse search for 5 epochs

```
max_count = 100
for count in xrange(max_count):
    reg = 10**uniform(-5, 5)
    lr = 10**uniform(-3, -6)

    trainer = ClassifierTrainer()
    model = init_two_layer_model(32*32*3, 50, 10) # input size, hidden size, number of classes
    trainer = ClassifierTrainer()
    best_model_local, stats = trainer.train(X_train, y_train, X_val, y_val,
                                           model, two_layer_net,
                                           num_epochs=5, reg=reg,
                                           update='momentum', learning_rate_decay=0.9,
                                           sample_batches = True, batch_size = 100,
                                           learning_rate=lr, verbose=False)
```

note it's best to optimize  
in log space!

```
val_acc: 0.412000, lr: 1.405206e-04, reg: 4.793564e-01, (1 / 100)
val_acc: 0.214000, lr: 7.231888e-06, reg: 2.321281e-04, (2 / 100)
val_acc: 0.208000, lr: 2.119571e-06, reg: 8.011857e+01, (3 / 100)
val_acc: 0.196000, lr: 1.551131e-05, reg: 4.374936e-05, (4 / 100)
val_acc: 0.079000, lr: 1.753300e-05, reg: 1.200424e+03, (5 / 100)
val_acc: 0.223000, lr: 4.215128e-05, reg: 4.196174e+01, (6 / 100)
val_acc: 0.441000, lr: 1.750259e-04, reg: 2.110807e-04, (7 / 100)
val_acc: 0.241000, lr: 6.749231e-05, reg: 4.226413e+01, (8 / 100)
val_acc: 0.482000, lr: 4.296863e-04, reg: 6.642555e-01, (9 / 100)
val_acc: 0.079000, lr: 5.401602e-06, reg: 1.599828e+04, (10 / 100)
val_acc: 0.154000, lr: 1.618508e-06, reg: 4.925252e-01, (11 / 100)
```

nice

# Now run finer search...

```
max_count = 100
for count in xrange(max_count):
    reg = 10**uniform(-5, 5)
    lr = 10**uniform(-3, -6)
```

adjust range

```
max_count = 100
for count in xrange(max_count):
    reg = 10**uniform(-4, 0)
    lr = 10**uniform(-3, -4)
```

```
val_acc: 0.527000, lr: 5.340517e-04, reg: 4.097824e-01, (0 / 100)
val_acc: 0.492000, lr: 2.279484e-04, reg: 9.991345e-04, (1 / 100)
val_acc: 0.512000, lr: 8.680827e-04, reg: 1.349727e-02, (2 / 100)
val_acc: 0.461000, lr: 1.028377e-04, reg: 1.220193e-02, (3 / 100)
val_acc: 0.460000, lr: 1.113730e-04, reg: 5.244309e-02, (4 / 100)
val_acc: 0.498000, lr: 9.477776e-04, reg: 2.001293e-03, (5 / 100)
val_acc: 0.469000, lr: 1.484369e-04, reg: 4.328313e-01, (6 / 100)
val_acc: 0.522000, lr: 5.586261e-04, reg: 2.312685e-04, (7 / 100)
val_acc: 0.530000, lr: 5.808183e-04, reg: 8.259964e-02, (8 / 100)
val_acc: 0.489000, lr: 1.979168e-04, reg: 1.010889e-04, (9 / 100)
val_acc: 0.490000, lr: 2.036031e-04, reg: 2.406271e-03, (10 / 100)
val_acc: 0.475000, lr: 2.021162e-04, reg: 2.287807e-01, (11 / 100)
val_acc: 0.460000, lr: 1.135527e-04, reg: 3.905040e-02, (12 / 100)
val_acc: 0.515000, lr: 6.947668e-04, reg: 1.562808e-02, (13 / 100)
val_acc: 0.531000, lr: 9.471549e-04, reg: 1.433895e-03, (14 / 100)
val_acc: 0.509000, lr: 3.140888e-04, reg: 2.857518e-01, (15 / 100)
val_acc: 0.514000, lr: 6.438349e-04, reg: 3.033781e-01, (16 / 100)
val_acc: 0.502000, lr: 3.921784e-04, reg: 2.707126e-04, (17 / 100)
val_acc: 0.509000, lr: 9.752279e-04, reg: 2.850865e-03, (18 / 100)
val_acc: 0.500000, lr: 2.412048e-04, reg: 4.997821e-04, (19 / 100)
val_acc: 0.466000, lr: 1.319314e-04, reg: 1.189915e-02, (20 / 100)
val_acc: 0.516000, lr: 8.039527e-04, reg: 1.528291e-02, (21 / 100)
```

**53%** - relatively good  
for a 2-layer neural net  
with 50 hidden neurons.

# Now run finer search...

```
max_count = 100
for count in xrange(max_count):
    reg = 10**uniform(-5, 5)
    lr = 10**uniform(-3, -6)
```

adjust range


```
max_count = 100
for count in xrange(max_count):
    reg = 10**uniform(-4, 0)
    lr = 10**uniform(-3, -4)
```

```
val_acc: 0.527000, lr: 5.340517e-04, reg: 4.097824e-01, (0 / 100)
val_acc: 0.492000, lr: 2.279484e-04, reg: 9.991345e-04, (1 / 100)
val_acc: 0.512000, lr: 8.680827e-04, reg: 1.349727e-02, (2 / 100)
val_acc: 0.461000, lr: 1.028377e-04, reg: 1.220193e-02, (3 / 100)
val_acc: 0.460000, lr: 1.113730e-04, reg: 5.244309e-02, (4 / 100)
val_acc: 0.498000, lr: 9.477776e-04, reg: 2.001293e-03, (5 / 100)
val_acc: 0.469000, lr: 1.484369e-04, reg: 4.328313e-01, (6 / 100)
val_acc: 0.522000, lr: 5.586261e-04, reg: 2.312685e-04, (7 / 100)
val_acc: 0.530000, lr: 5.808183e-04, reg: 8.259964e-02, (8 / 100)
val_acc: 0.489000, lr: 1.979168e-04, reg: 1.010889e-04, (9 / 100)
val_acc: 0.490000, lr: 2.036031e-04, reg: 2.406271e-03, (10 / 100)
val_acc: 0.475000, lr: 2.021162e-04, reg: 2.287807e-01, (11 / 100)
val_acc: 0.460000, lr: 1.135527e-04, reg: 3.905040e-02, (12 / 100)
val_acc: 0.515000, lr: 6.947668e-04, reg: 1.562808e-02, (13 / 100)
val_acc: 0.531000, lr: 9.471549e-04, reg: 1.433895e-03, (14 / 100)
val_acc: 0.509000, lr: 3.140888e-04, reg: 2.857518e-01, (15 / 100)
val_acc: 0.514000, lr: 6.438349e-04, reg: 3.033781e-01, (16 / 100)
val_acc: 0.502000, lr: 3.921784e-04, reg: 2.707126e-04, (17 / 100)
val_acc: 0.509000, lr: 9.752279e-04, reg: 2.850865e-03, (18 / 100)
val_acc: 0.500000, lr: 2.412048e-04, reg: 4.997821e-04, (19 / 100)
val_acc: 0.466000, lr: 1.319314e-04, reg: 1.189915e-02, (20 / 100)
val_acc: 0.516000, lr: 8.039527e-04, reg: 1.528291e-02, (21 / 100)
```

**53%** - relatively good for a 2-layer neural net with 50 hidden neurons.

But this best cross-validation result is worrying. Why?

# Random Search vs. Grid Search

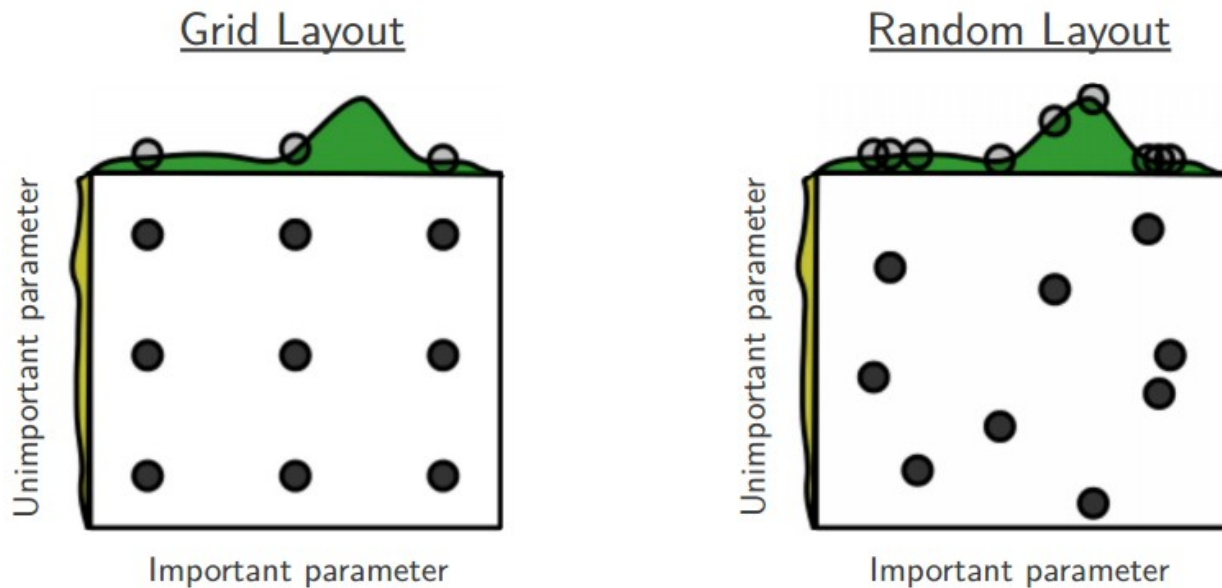

*Random Search for Hyper-Parameter Optimization*  
Bergstra and Bengio, 2012




# Hyperparameters to play with:

- network architecture
- learning rate, its decay schedule, update type
- regularization (L2)



neural networks practitioner  
music = loss function




# My cross-validation “command center”

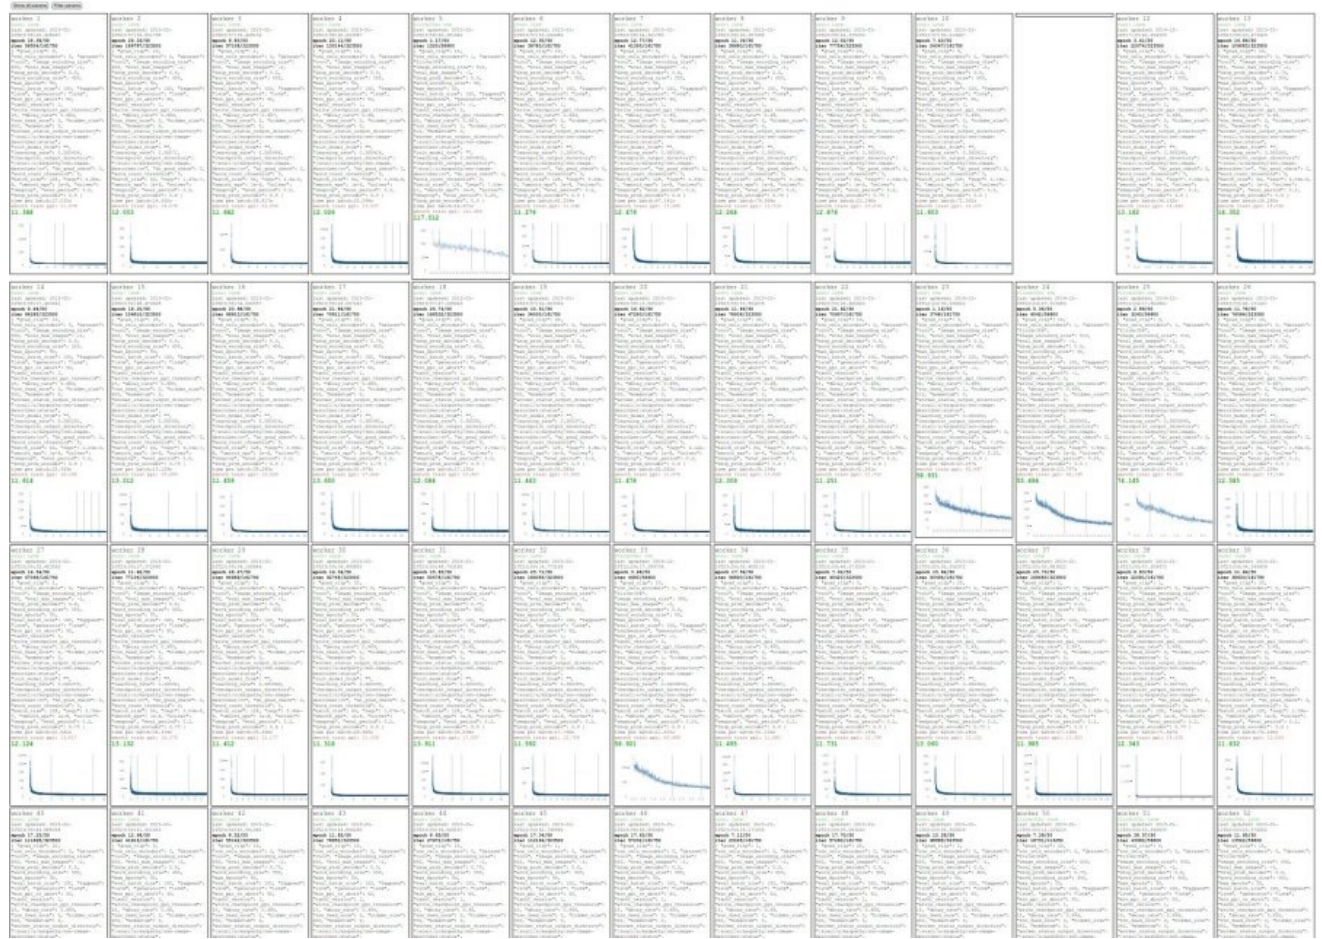


# Monitor and visualize the loss curve

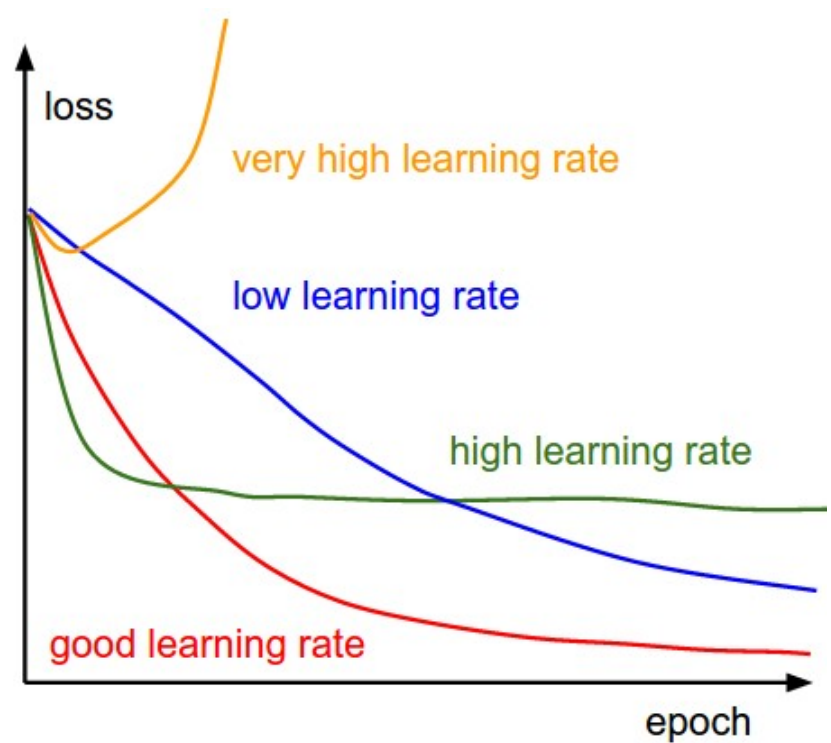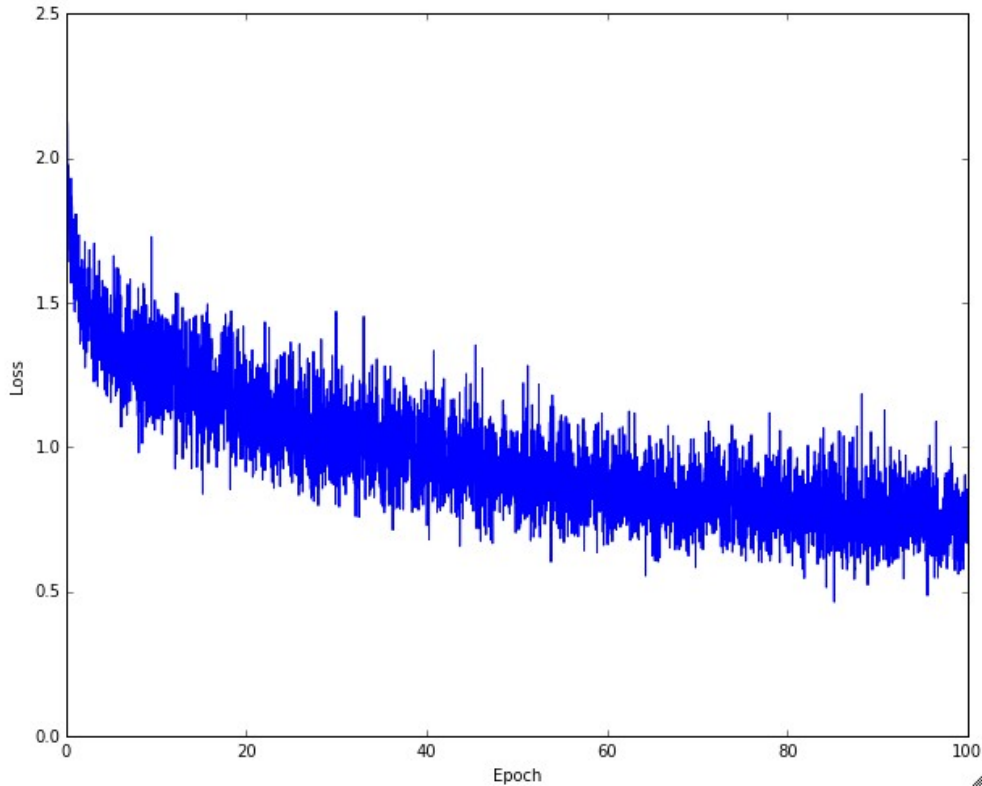


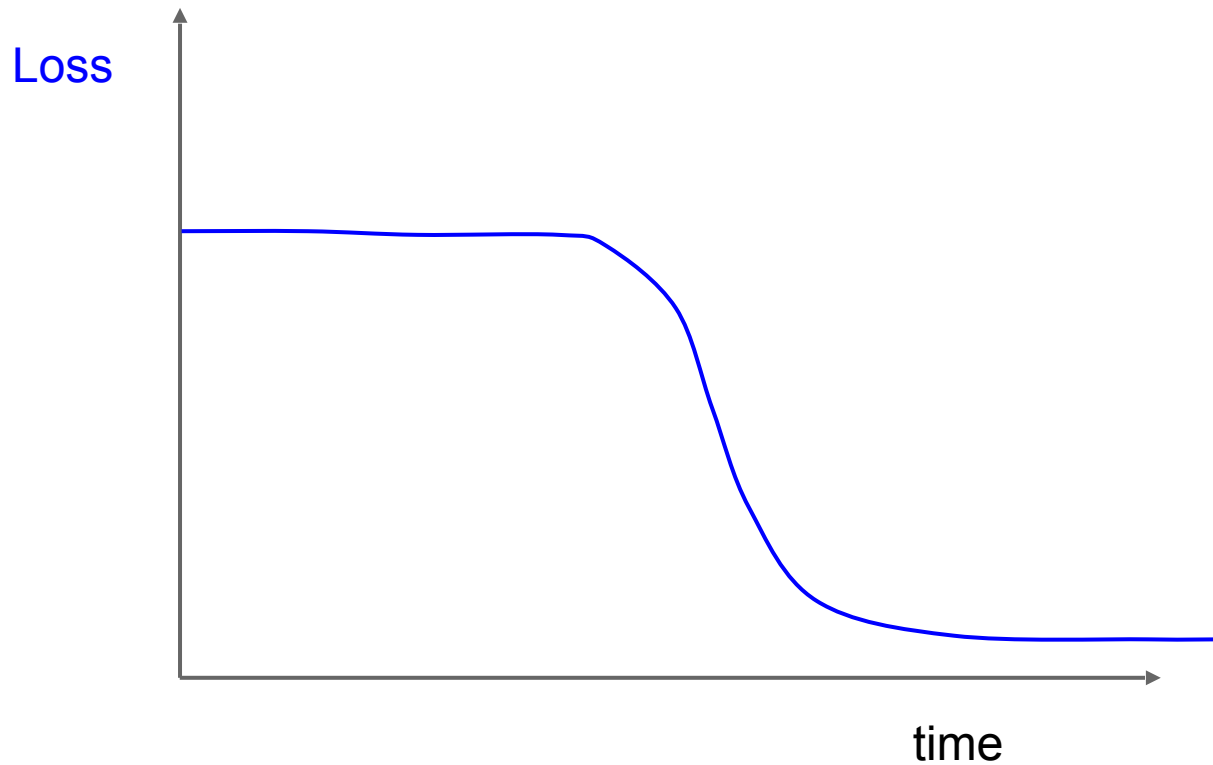



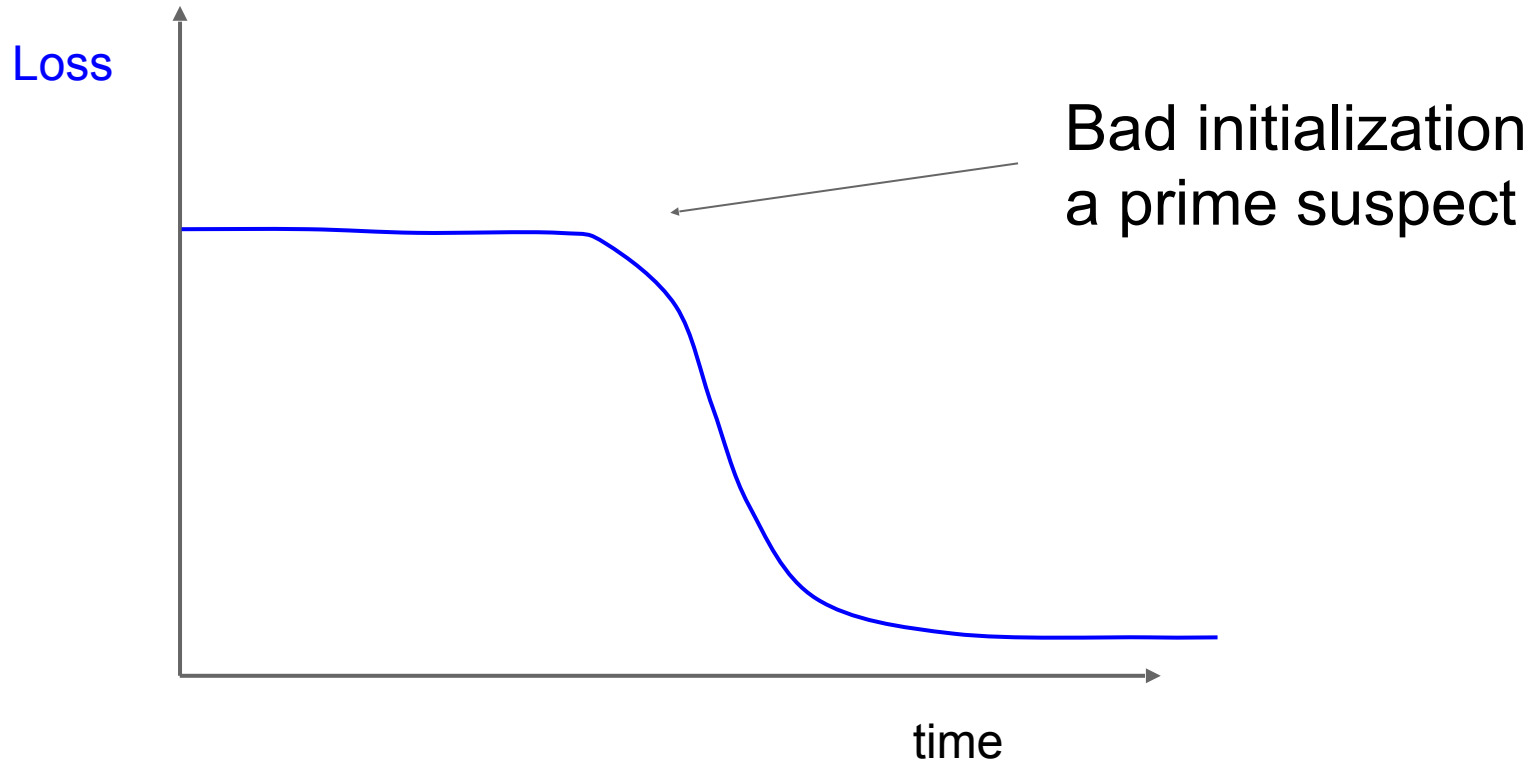

# Monitor and visualize the accuracy:

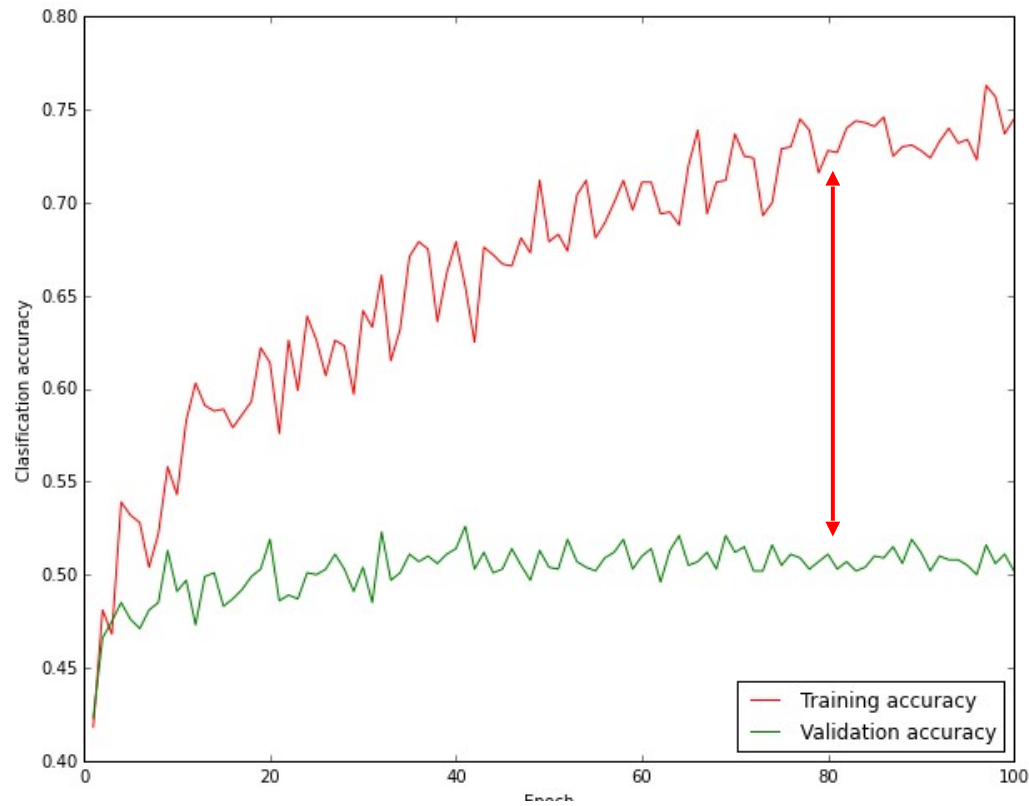

**big gap = overfitting**

**=> increase regularization strength?**

**no gap**

**=> increase model capacity?**

# Track the ratio of weight updates / weight magnitudes:

```
# assume parameter vector W and its gradient vector dW
param_scale = np.linalg.norm(W.ravel())
update = -learning_rate*dW # simple SGD update
update_scale = np.linalg.norm(update.ravel())
W += update # the actual update
print update_scale / param_scale # want ~1e-3
```

ratio between the values and updates:  $\sim 0.0002 / 0.02 = 0.01$  (about okay)  
**want this to be somewhere around 0.001 or so**

# Summary

## TLDRs

We looked in detail at:

- Activation Functions (use ReLU)
- Data Preprocessing (images: subtract mean)
- Weight Initialization (use Xavier init)
- Batch Normalization (use)
- Gradient Checking
- Babysitting the Learning process
- Hyperparameter Optimization (random sample hyperparams, in log space when appropriate)

# TODO

Look at:

- Parameter update schemes
- Learning rate schedules
- Regularization (Dropout etc)
- Evaluation (Ensembles etc)